





1" Ceramic Dome Tweeter

Program Power	200 W
Rated impedance	4 Ohm
Nominal diameter	1" - 26 mm
Sensitivity (1W/1m)	90 dB
Voice coil diameter	1 in - 26 mm
Frequency Range	2000-20000 Hz

SPECIFICATIONS

Nominal Diameter	1" - 26 mm	
Rated Impedance	4 Ohm	
Nominal Power Handling ¹	100 W	
Program Power ²	200 W	
Sensitivity ³	90 dB	
Frequency Range ⁴	2000-20000 Hz	
Minimum Impedance	-	
Flange material	-	
Magnet Material	Ferrite	
Diaphragm Material	Silk soft dome	
Diaphragm Shape	Dome	
Surround	-	
Voice Coil Diameter	1 in - 26 mm	
Voice Coil Winding Material	-	
Voice Coil Former Material	Aluminum	
Flux Density	-	
Ferrofluid	No	
Connection type	-	
Recommended Crossover Frequency	-	
Alternative Available Version	8 Ohm	HT262

FREQUENCY RESPONSE AND IMPEDANCE CURVE ^{6 7}

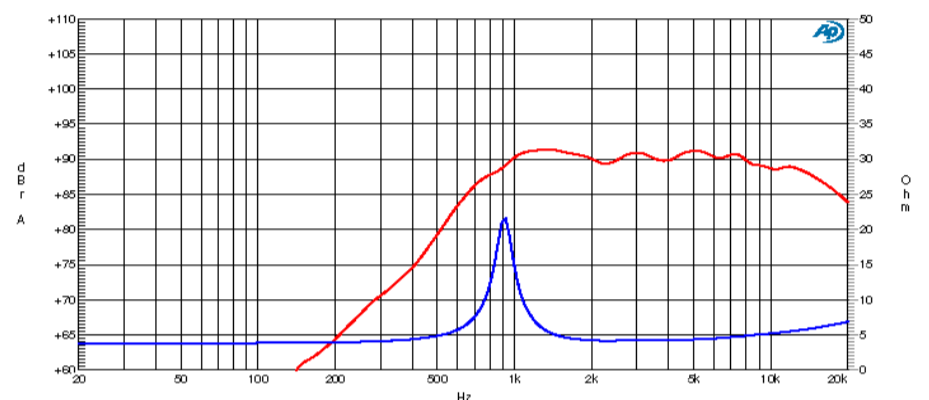

T/S PARAMETERS

4 Ohm

Resonance frequency	Fs	1000 Hz
DC Resistance	Re	3,25 Ohm
Mechanical Q Factor	Qms	3,5
Electrical Q Factor	Qes	1,14
Total Q Factor	Qts	0,86
Bl Factor	Bl	2,5 Tm
Effective Moving Mass	Mms	0,35 g
Suspension Compliance	Cms	-
Effective Piston Diameter	D	32 mm - 1,26 in
Effective piston area	Sd	8 cm ² - 1,24 sq in
Voice Coil Inductance @ 1kHz	Le	0,03 mH

MOUNTING AND SHIPPING INFORMATION

Overall Diameter	100 mm - 3,94 in
Baffle Cutout Diameter	77 mm - 3,03 in
Flange Thickness	4 mm - 0,16 in
Total Depth	30 mm - 1,18 in
Bolt Circle Diameter	88 mm - 3,46 in
Bolt Holes Quantity and Diameter	4 / 5 mm - 0,2 in
Net Weight	0,63 Kg - 1,39 lb
Shipping Units	12 Pcs

NOTES

- ¹ Nominal power is determined according to AES2-1984 (r2003) standard.
- ² Program Power is defined as 3 dB greater than the Nominal rating.
- ³ Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
- ⁴ Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- ⁵ Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.
- ⁶ Frequency response curve is measured on IEC Baffle.
- ⁷ Impedance curve is measured in free air conditions at small signals.