# **HWB130**



#### **SPECIFICATIONS**

hinal Diameter ed Impedance hinal Power Handling 1 gram Power 2 sitivity 3 quency Range 4 imum Impedance ket Material gnet Material e Material e Material e Shape round pension ce Coil Diameter ce Coil Diameter ce Coil Winding Material ce Coil Winding Material ce Coil Length ce Coil Former Material nection type offuid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ime / Tuning frequency	Ell 100 mana
ninal Power Handling 1 gram Power 2 sitivity 3 quency Range 4 imum Impedance ket Material gnet Material e Material e Material e Shape round pension ce Coil Diameter e Coil Diameter e Coil Diameter e Coil Length ce Coil Former Material ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	5''- 130 mm
gram Power <sup>2</sup> sitivity <sup>3</sup> quency Range <sup>4</sup> imum Impedance ket Material gnet Material e Material e Material e Shape round pension cound pension ce Coil Diameter ce Coil Diameter ce Coil Length ce Coil Length ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	4 Ohm
sittivity <sup>3</sup> quency Range <sup>4</sup> imum Impedance ket Material gnet Material e Material e Material e Shape round pension ce Coil Diameter e Coil Diameter e Coil Jiameter e Coil Length ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	80 W
quency Range <sup>4</sup> imum Impedance ket Material anet Material e Material e Shape round pension ce Coil Diameter ce Coil Diameter ce Coil Length ce Coil Length ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	160 W
imum Impedance ket Material gnet Material e Material e Material e Shape round pension ce Coil Diameter ce Coil Diameter ce Coil Unding Material ce Coil Length ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading une / Tuning frequency	92 dB
ket Material gnet Material e Material e Material e Shape round pension ce Coil Diameter ce Coil Diameter ce Coil Winding Material ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	55-7000 Hz
gnet Material e Material e Material e Shape round pension ce Coil Diameter ce Coil Diameter ce Coil Winding Material ce Coil Length ce Coil Length ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	-
e Material e Shape round pension ce Coil Diameter e Coil Diameter e Coil Winding Material ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	Aluminum
e Shape round pension æ Coil Diameter æ Coil Winding Material æ Coil Length æ Coil Former Material nection type ofluid gnetic Gap Height & Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading	Ferrite
round pension ce Coil Diameter ce Coil Winding Material ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading	Doped cellulose fiber
pension ce Coil Diameter ce Coil Winding Material ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading	Exponential
ce Coil Diameter ce Coil Winding Material ce Coil Length ce Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading	Rubber
ee Coil Winding Material ee Coil Length ee Coil Former Material nection type ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	Cotton fabric
ee Coil Length ee Coil Former Material nection type ofluid gnetic Gap Height x. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	1,25 in - 32 mm
ee Coil Former Material nection type ofluid gnetic Gap Height & Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	Copper
nection type ofluid gnetic Gap Height x. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	12 mm - 0,47 in
ofluid gnetic Gap Height c. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	Kapton
gnetic Gap Height x. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ume / Tuning frequency	-
x. Peak to Peak Excursion ciency Bandwidth Product EBP ommended Loading ime / Tuning frequency	No
ciency Bandwidth Product EBP ommended Loading ime / Tuning frequency	6 mm - 0,24 in
ommended Loading Ime / Tuning frequency	-
ime / Tuning frequency	159
	Vented Box
imum recommended frequency	7 Lt (dm³) - 0,247 cuft / 58 Hz
	-
sion - Part Code 8 Ohm	HWB130
4 Ohm	


T/S PARAMETERS			4 Ohm
Resonance frequency	Fs	46 Hz	
DC Resistance	Re	3 Ohm	
Mechanical Q Factor	Qms	5,9	
Electrical Q Factor	Qes	0,29	
Total Q Factor	Qts	0,28	
BI Factor	BI	5,6 Tm	
Effective Moving Mass	Mms	10,5 g	
Equivalent Cas air loaded	Vas	12,5 lt (dm <sup>3</sup> ) - 0,44 cuft	
Suspension Compliance	Cms	-	
Effective Piston Diameter	D	105 mm - 4,13 in	
Effective piston area	Sd	87 cm² - 13,49 sq in	
Max. Linear Excursion <sup>5</sup>	Xmax	4,5 mm - 0,18 in	
Voice Coil Inductance @ 1kHz	Le	1,2 mH	
Half-space Efficency	ŋ0	0,41 %	

## 5" Ceramic Woofer


**Program Power Rated impedance** Nominal diameter Sensitivity (2,83V/1m) Voice coil diameter **Frequency Range** 


160 W 4 Ohm 5''- 130 mm 92 dB 1,25 in - 32 mm 55-7000 Hz

### **FREQUENCY RESPONSE CURVE 6**

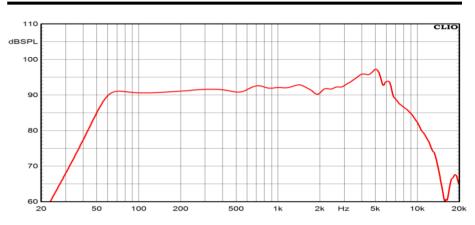

### FREE AIR IMPEDANCE CURVE 7

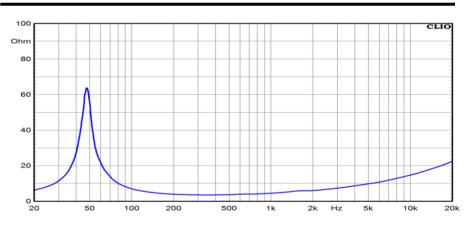



#### MOUNTING AND SHIPPING INFORMATION

Overall Diameter	146 mm - 5,75 in
Baffle Cutout Diameter	117 mm - 4,61 in
Flange and Gasket Thickness	6 mm - 0,24 in
Total Depth	75 mm - 2,95 in
Bolt Circle Diameter	135,5 mm - 5,33 in
Bolt Holes Quantity and Diameter	6 / 4,5 mm - 0,18 in
Net Weight	1,6 Kg - 3,52 lb
Shipping Units	6 Pcs

#### NOTES

<sup>1</sup> Nominal power is determined according to AES2-1984 (r2003) standard. <sup>2</sup> Program Power is defined as 3 dB greater than the Nominal rating.

<sup>3</sup> Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m, when connected to 2,83V sine wave test signal.
<sup>4</sup> Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.

<sup>6</sup> Frequency response curve In the range above 150 Hz is measured on infinite baffle conditions and simulated as per recommended loading in the range below 150 Hz.

<sup>7</sup> Impedance curve is measured in free air conditions at small signals.

<sup>&</sup>lt;sup>5</sup> Linear Math. Xmax is calculated as (Hvc-Hg)/2 + Hg/4 where Hvc is the coil depth and Hg is the gapdepth.